



GUIDEMASTER®

TACTILE INDICATORS



PRODUCT DATA SHEET

Published August 2023

GMRTD4002

*Guidemaster Leading / Directional Tactile Indicator
—Rapid Tile*

GMPTD4002 Guidemaster Tactile Ground Surface Indicator – Rapid tile directional tactile indicator recommended for indoors and outdoors, commercial carparks, footpaths, shopping centre, hospitals, schools – any public spaces requiring accessibility treatment.



SPECIFICATIONS

Masterspec Code	Interior: 6615FG / Exterior: 8281FG
Warranties	Installation warranty: 1 year Product warranty: 2 years (Exterior)
Code Compliance	NZTA RTS14 —Land Transport New Zealand – Guidelines for facilities for the blind and vision impaired. AS/NZS 1428.4.2009 —Design for access and mobility, Part 4 NZS4121:2001 —Design for access and mobility—building and associated facilities All slip resistance tests are done in accordance with AS/NZS4586:2004 Land Transport's Pedestrian Planning and Design Guide The Royal N.Z. Foundation for the Blind Design Guide Recommendations/ Specifications

Base Material	UV Resistant Thermoplastic Polyurethane
Dimensions	Width: 300mm Height: 300mm Thickness: 4.5mm
Colours	Safety yellow, Green, Black & Grey. Custom colours available upon request.
Features & Application	Provides direction to the blind and visually impaired
Installation Methods	Surface Fixed with Adhesive Peel-and-stick
Slip Resistance Rating	WET and DRY Rating of P4
Luminance Test	Provides colour contrast. Integrated TGSi must be 30% to that of the surround substrate surface area.






GUIDEMASTER®

TACTILE INDICATORS



PRODUCT TECHNICAL DRAWING

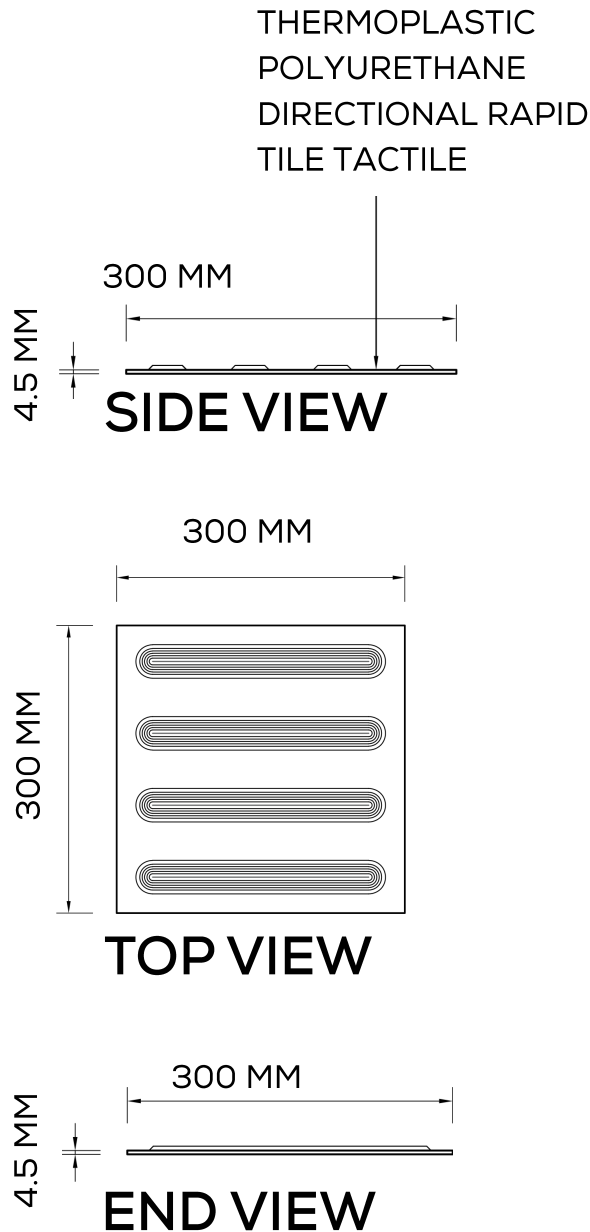

PREVIOUS PROJECTS

