


PRODUCT DATA SHEET

Published August 2023

TMMS2BL

Treadmaster Entrance Matting Maxi Step 2 Series – Black

TMMS2BL Treadmaster Maxi Step 2 Black Anodised Anti-slip Entrance Matting with Marine Grade Carpet. Designed as a Heavy Duty Architectural Entry Mat Solution for front/back doors, side doors, service entrances & wind lobbies.

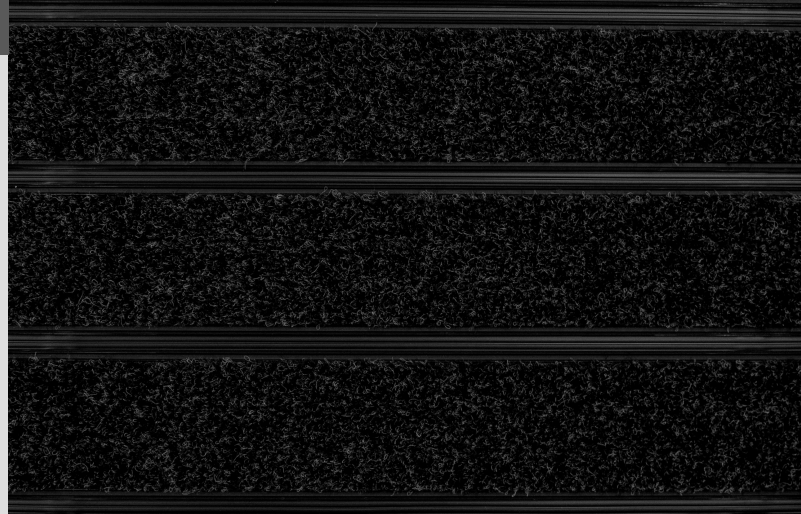

SPECIFICATIONS


Masterspec Code	Interior: 6612FT
Warranties	Product warranty: 10 years Installation warranty: 1 year
Fire Rating	S 1530 Part 3: Spread of Flame (Index 0-10) 0. Smoke Developed (index 0-10) 4. AS/ISO 9239 Part 1: Average Critical Radiant Flux: 7.4kW/m2. Average Smoke Obscuration: 362% min
Code Compliance	NZBC D1/AS1 - Access routes—Clause D1/AS1 2.1.6- Entranceway. Requirement for effective entrance matting system. NZBCC/AS2-AS6 Acceptable Solutions - Step Carpet tested to 1509239.1. Achieves all minimum critical radiant flux requirements of NZBCC/AS2-AS6. AS/NZS 4586:2013 Slip resistance classification of new pedestrian surface materials Clause 5.2 Table 2— Achieves P5 Slip resistance with SRV Value of 70—75.

Carpet Type	Marine grade carpet. No zipper ing will occur for the serviceable life of the carpet. UV stabilized—high degree of UV protection. Moisture absorption-0.006%
Finish	Black Anodized-35 µm
Dimensions	Length: up to 6m modules Width: 60mm wide carpet inserts, 80mm increments Depth: 12mm
Installation Method	Rebated or Surface Mounted with Ramp Trim as a loose-laid system with Perimeter Frame Installed. For mats over 3 meters wide, T-Bar is recommended to ease up cleaning of carpets.
Sustainability	Declare Label Certified LBC Compliant—Red List Approved Reduces energy consumption, extending life of flooring, reduces water consumption and improves indoor air quality.




PRODUCT TECHNICAL DRAWING

REBATED INTO SUB-

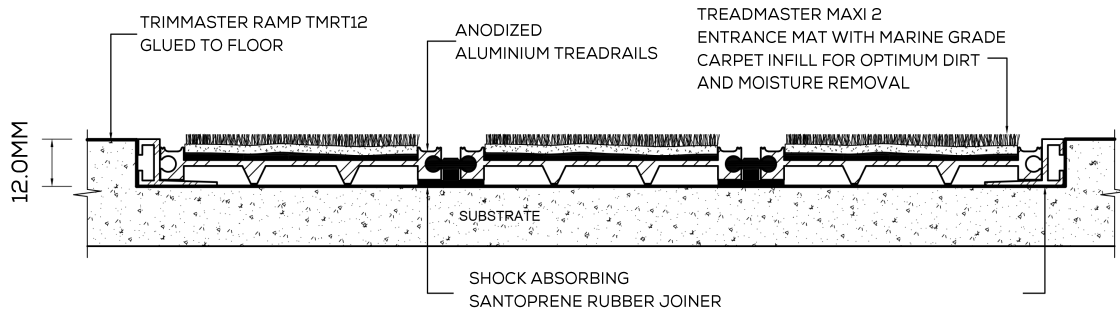

SURFACE MOUNTED WITH RAMP

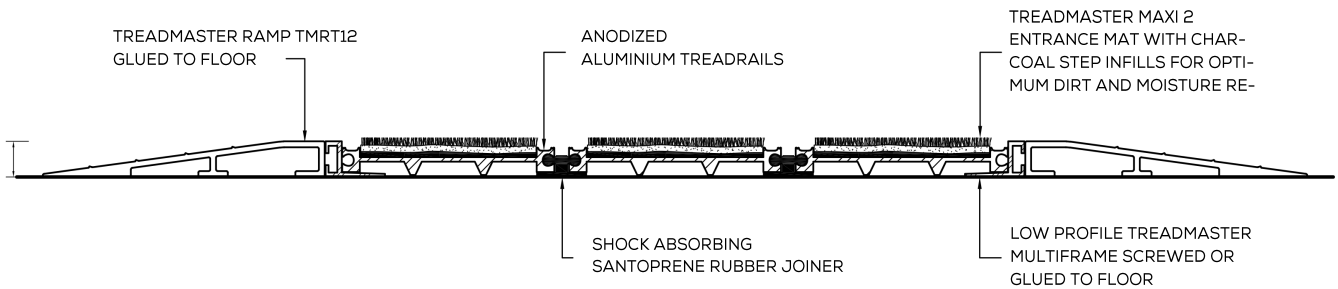

PREVIOUS PROJECTS

