HALTMASTER® TRAFFIC MANAGEMENT



PRODUCT DATA SHEET

Published August 2023

HMCP350

Haltmaster Corner Protection

HMCP350 Haltmaster Corner Protection – Impact Absorbing Polyurethane foam core with a hard plastic outer, recommended for installation on Corners of Underground Carparks for Transport Sectors.



SPECIFICATIONS

Masterspec Code

Warranties

Temperature Rating

.

Interior: 8262HM

Installation warranty: 1 year

Product warranty: 10 years

Range from -40 degrees C to 100

degrees C

Code Compliance NZ Transport Agency Traffic Con

trol Devices Manual (TCD Manu

al) - Performance requirements for barrier systems, including corner protection systems, and provides guidance on the selection and installation of such

systems.

AS/NZS 2890:1:2004 - Clause

2.5.8 - "Protection of buildings and

other structures."

Material Polyurethane Foam Core

Finish Sealed Finish

Dimensions Thickness: 7 mm

Width: 26 mm

Inner Width: 19 mm Length: 1000 mm

Features A hard impacts preventing

injury and damage, provides high visibility to danger zones, is moisture resistant making them suitable for interior and exterior applications, are flexible so can be fitted to curved surfaces. Used on steel columns, pallet racking, walls, corners and anywhere.

Installation Methods Double sided tape and adhesive

fixed

8 Cooper Street, Havelock North 4130 PO Box 8740, Havelock North 4130

Unit 2, 24 Inlet Road, Takanini Auckland 2112

09 320 1338 or Toll Free 0800 687 004

ARCHITECTURAL PRODUCTS















HALTMASTER® TRAFFIC MANAGEMENT



PRODUCT TECHNICAL DRAWING

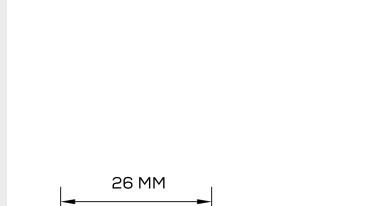



PREVIOUS PROJECTS







- 8 Cooper Street, Havelock North 4130 PO Box 8740, Havelock North 4130
- Unit 2, 24 Inlet Road, Takanini Auckland 2112
- 09 320 1338 or Toll Free 0800 687 004

ARCHITECTURAL PRODUCTS











