Freedom Works™



Stair Nosings & Inserts - SMN211 Technical Data Sheet

| Product Name | SMN211 Stair Nosing | | |
|--------------------|---|----------|--|
| Description | Anodised Aluminium base with a Solid Carborundum Insert, recommended for rebating on Accessible Stairs, Fire Egress, Back of House, Vinyl, Common Stairs and Service Stairs | | |
| Freedom Works Code | SMN211 | | |
| Masterspec Code | 6614FS | | |
| Warranty | Installation Warranty | 1 year | |
| | Product Warranty | 10 years | |

| Code Compliance | NZBC D1/AS1 | Access routes |
|-----------------|-------------|--------------------------------|
| | NZS 4121 | Design for access and mobility |

| Base Material | Alloy: 6060, Temper: T5 | | |
|---------------------|--|-----------------------------------|--|
| Finish | Silver, Black, Bronze or Gold Anodized – 30 µm | | |
| Dimensions | Tread Width | 72mm | |
| | Front Depth | 35mm | |
| | Tread Thickness | 4.8mm | |
| Installation Method | Adhesive Only or Mechanical and Adhesive Fixing | | |
| | Masonry screw 6mm x 30mm | | |
| Insert Type | Solid epoxy based Carborundum – Heavy Duty, External Grade | | |
| Insert Width | 54mm | | |
| Insert Colours | Black, Safety Yellow, Luminescent, Grey - other colours available on request | | |
| Application | Predrilled and countersunk for secret screw fixing – One installed, insert covers all fixing | | |
| Sustainability | Declare Label Certified | | |
| | LBC Compliant | Red List Approved | |
| Slip Ratings | Slip Resistance | AS/NZS 4586: 2004 Slip Resistance | |
| | Rating | Average COF of 73 | |

freedomworks.co.nz sales@freedomworks.co.nz

09 320 1338 0800 687 004

Scan to visit the webpage
















Freedom Works™

Product Image



Stair Nosings & Inserts - SMN211 Technical Drawings & Imagery

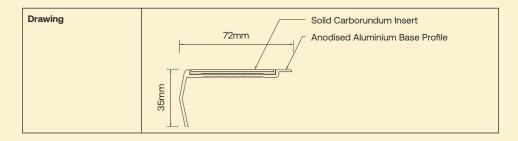



freedomworks.co.nz sales@freedomworks.co.nz

09 320 1338 0800 687 004

Scan to visit the webpage











