



Stair Nosings & Inserts - SMN310 Technical Data Sheet

| | | |
|---------------------------|---|---------|
| Product Name | SMN310 Stair Nosing | |
| Description | Anodised Aluminium base with a Solid Santoprene Insert, recommended for surface mounting on Accessible Stairs, Fire Egress, Back of House, Common Stairs and Service Stairs | |
| Freedom Works Code | SMN310 | |
| Masterspec Code | 6614FS | |
| Warranty | Installation Warranty | 1 year |
| | Product Warranty | 5 years |

freedomworks.co.nz
sales@freedomworks.co.nz

09 320 1338
0800 687 004

Scan to visit the webpage




| | | |
|------------------------|-------------|--------------------------------|
| Code Compliance | NZBC D1/AS1 | Access routes |
| | NZS 4121 | Design for access and mobility |

| | | |
|----------------------------|--|-----------------------------------|
| Base Material | Alloy: 6060, Temper: T5 | |
| Finish | Silver, Black, Bronze or Gold Anodized – 30 µm | |
| Dimensions | Tread Width | 85mm |
| | Front Depth | 35mm |
| | Tread Thickness | 5mm |
| Installation Method | Adhesive Only or Mechanical and Adhesive Fixing | |
| | Masonry screw 6mm x 30mm | |
| Insert Type | Santoprene Rubber | |
| Insert Width | 54mm | |
| Insert Colours | Black, Safety Yellow, Luminescent, Grey – other colours available on request | |
| Application | Predrilled and countersunk for secret screw fixing – One installed, insert covers all fixing | |
| Sustainability | Declare Label Certified | |
| | LBC Compliant | Red List Approved |
| Slip Ratings | Slip Resistance | AS/NZS 4586: 2004 Slip Resistance |
| | Rating | Average COF of 73 |



Stair Nosings & Inserts - SMN310 Technical Drawings & Imagery

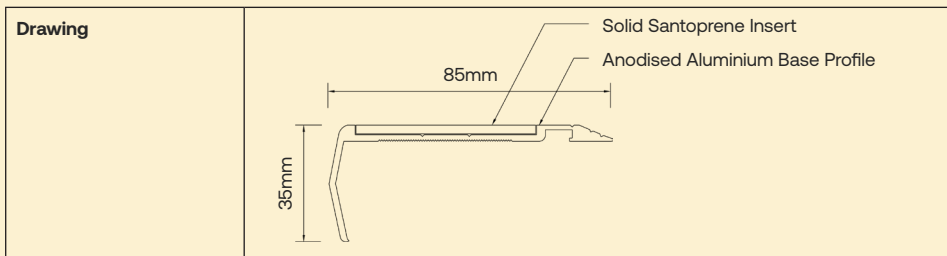

freedomworks.co.nz
sales@freedomworks.co.nz

09 320 1338
0800 687 004

Scan to visit the webpage

