

Entrance Matting - TMAS2BR Technical Data Sheet

Product Name	TMAS2BR Alpha Step 2 Bronze Anodised	
Description	Anti-slip Entrance Matting with Marine Grade Carpet. Designed as a Heavy Duty Architectural Entry Mat Solution for front/back doors, side doors, service entrances & wind lobbies	
Freedom Works Code	TMAS2BR	
Masterspec Code	Interior	6612FT
Warranty	Installation Warranty	1 year
	Product Warranty	10 years

Fire Rating	S 1530 Part 3:	Spread of Flame (Index 0-10) 0	
		Smoke Developed (index 0-10) 4	
	AS/ISO 9239 Part 1:	Average Critical Radiant Flux:	7.4kW/m ²
		Average Smoke Obscuration:	362% min

Code Compliance	NZBC D1/AS1	Access routes - Clause D1/AS1 2.1.6 - Entranceway Requirement for effective entrance matting system
	NZBCC/AS2-AS6	Acceptable Solutions - Step Carpet tested to 1509239.1. Achieves all minimum critical radiant flux requirements of NZBCC/AS2-AS6
	AS/NZS 4586:2013	Slip resistance classification of new pedestrian surface materials Clause 5.2 Table 2 - Achieves P5 Slip resistance with SRV Value of 70-75

Carpet Type	Marine grade carpet. No zippering will occur for the serviceable life of the carpet. UV stabilized-high degree of UV protection. Moisture absorption-0.006%	
Finish	Bronze Anodized—30 µm	
Dimensions	Width	30mm wide carpet inserts, 50mm increments
	Length	up to 6m modules
	Depth	12mm
Installation Method	Rebated or Surface Mounted with Ramp Trim as a loose-laid system with Perimeter Frame Installed. For mats over 3 meters wide, T-Bar is recommended to ease up cleaning of carpets	
Sustainability	Declare Label Certified	
	LBC Compliant	Red List Approved
	Reduces energy consumption, extending life of flooring, reduces water consumption and improves indoor air quality.	


freedomworks.co.nz
sales@freedomworks.co.nz

09 320 1338
0800 687 004

Scan to visit the webpage



Entrance Matting - TMAS2BR Technical Drawings & Imagery

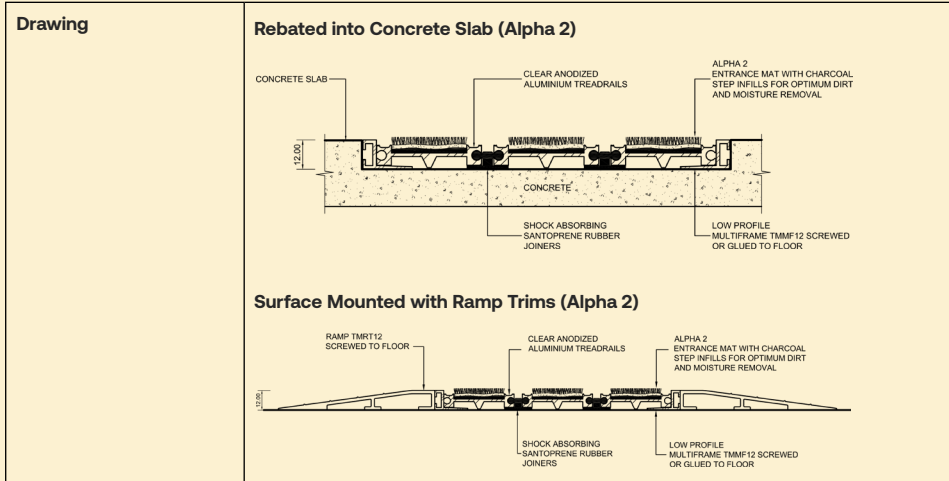

freedomworks.co.nz
sales@freedomworks.co.nz

09 320 1338
0800 687 004

Scan to visit the webpage

