
Freedom Works



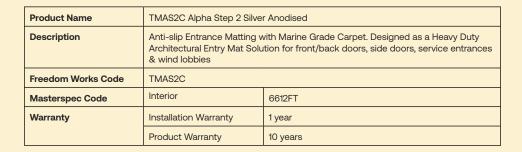

Fire Rating	S 1530 Part 3:	Spread of Flame (Index 0-10) 0	
		Smoke Developed (index 0-10) 4	
	AS/ISO 9239 Part 1:	Average Critical Radiant Flux:	7.4kW/m²
		Average Smoke Obscuration:	362% min

Code Compliance	NZBC D1/AS1	Access routes - Clause D1/AS1 2.1.6 - Entranceway Requirement for effective entrance matting system
	NZBCC/AS2-AS6	Acceptable Solutions - Step Carpet tested to 1509239.1. Achieves all minimum critical radiant flux requirements of NZBCC/AS2-AS6
	AS/NZS 4586:2013	Slip resistance classification of new pedestrian surface materials Clause 5.2 Table 2 - Achieves P5 Slip resistance with SRV Value of 70-75

Carpet Type	Marine grade carpet. No zippering will occur for the serviceable life of the carpet. UV stabilized-high degree of UV protection. Moisture absorption-0.006%		
Finish	Silver Anodized-30 µm		
Dimensions	Width	30mm wide carpet inserts, 50mm increments	
	Length	up to 6m modules	
	Depth	12mm	
Installation Method	Rebated or Surface Mounted with Ramp Trim as a loose-laid system with Perimeter Frame Installed. For mats over 3 meters wide, T-Bar is recommended to ease up cleaning of carpets		
Sustainability	Declare Label Certified		
	LBC Compliant	Red List Approved	
	Reduces energy consumption, extending life of flooring, reduces water consumption and improves indoor air quality.		

freedomworks.co.nz sales@freedomworks.co.nz

09 320 1338 0800 687 004

Scan to visit the webpage

















Freedom Works

Entrance Matting - TMAS2C Technical Drawings & Imagery

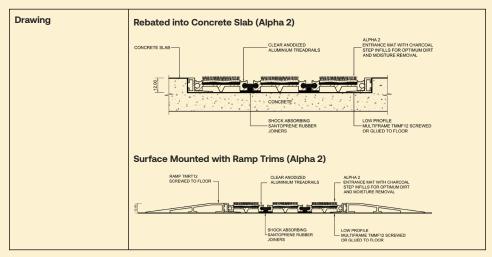

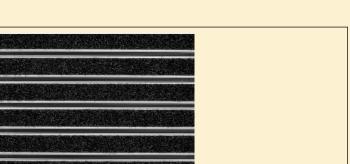

freedomworks.co.nz sales@freedomworks.co.nz

09 320 1338 0800 687 004

Scan to visit the webpage





Product Image









