Freedom Works





Fire Rating CHF (Critical Radiant Flux CRF)	Mean of 4.4 kW/m2
---	-------------------

Code Compliance	Step Carpet tested to 1509239.1		
	Achieves all minimum critical radiant flux requirements of NZBCC/AS2-AS6. Table 4.2 and ISO 9239-1:2010.		
	AS 1530 Part 3	Spread of Flame (Index 0-10) 0	

Carpet Type	Marine grade carpet. No zippering will occur for the serviceable life of the carpet. UV stabilized—high degree of UV protection. Moisture absorption—0.006%	
Finish	Solid Black Rubber Base Profile with Black Marine Grade Carpet Inserts	
Dimensions	Width	500mm
	Length	500mm
	Height	4mm
Installation Method	Surface mounted to suit standard carpet tile or transition trims for vinyl/rubber	
Sustainability	Declare Label Certified	
	LBC Compliant	Red List Approved

freedomworks.co.nz sales@freedomworks.co.nz

09 320 1338 0800 687 004

Scan to visit the webpage
















Freedom Works[™]

Entrance Matting - TMGXS2 Technical Drawings & Imagery

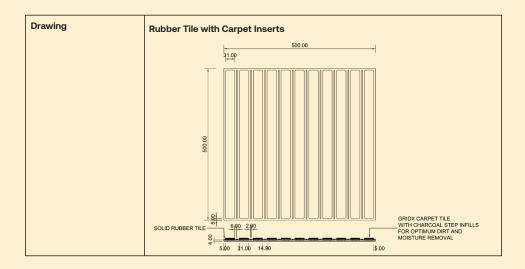

freedomworks.co.nz sales@freedomworks.co.nz

09 320 1338 0800 687 004

Scan to visit the webpage















