


TMMS2C

Treadmaster Entrance Matting Maxi Step 2 Series – Silver

TMMS2C Treadmaster Maxi Step 2 Silver Anodised Anti-slip Entrance Matting with Marine Grade Carpet. Designed as a Heavy Duty Architectural Entry Mat Solution for front/back doors, side doors, service entrances & wind lobbies.

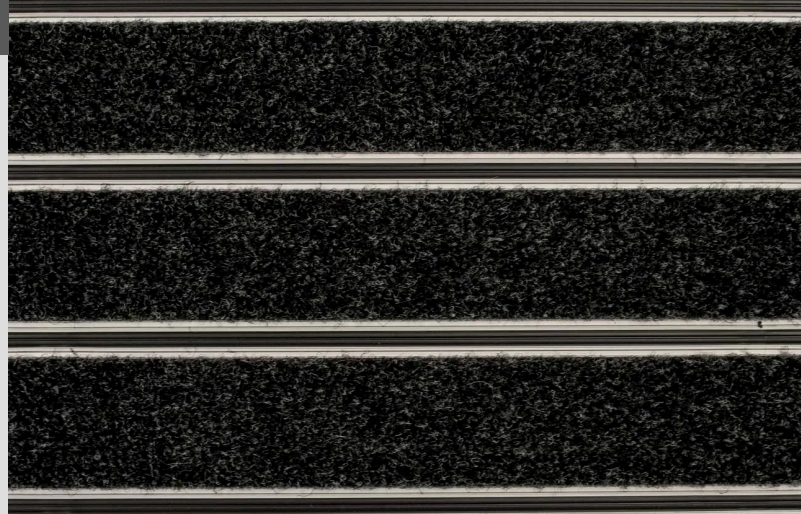


SPECIFICATIONS

| | |
|------------------------|--|
| Masterspec Code | Interior: 6612FT |
| Warranties | Product warranty: 10 years Installation warranty: 1 year |
| Fire Rating | S 1530 Part 3: Spread of Flame (Index 0-10) 0. Smoke Developed (index 0-10) 4. AS/ISO 9239 Part 1: Average Critical Radiant Flux: 7.4kW/m2. Average Smoke Obscuration: 362% min |
| Code Compliance | NZBC D1/AS1 - Access routes—Clause D1/AS1 2.1.6- Entranceway. Requirement for effective entrance matting system. NZBCC/AS2-AS6 Acceptable Solutions - Step Carpet tested to 1509239.1. Achieves all minimum critical radiant flux requirements of NZBCC/AS2-AS6. AS/NZS 4586:2013 Slip resistance classification of new pedestrian surface materials Clause 5.2 Table 2— Achieves P5 Slip resistance with SRV Value of 70—75. |

| | |
|----------------------------|--|
| Carpet Type | Marine grade carpet. No zipper ing will occur for the serviceable life of the carpet. UV stabilized—high degree of UV protection. Moisture absorption-0.006% |
| Finish | Silver Anodized-30 µm |
| Dimensions | Length: up to 6m modules Width: 60mm wide carpet inserts, 80mm increments Depth: 12mm |
| Installation Method | Rebated or Surface Mounted with Ramp Trim as a loose-laid system with Perimeter Frame Installed. For mats over 3 meters wide, T-Bar is recommended to ease up cleaning of carpets. |
| Sustainability | Declare Label Certified LBC Compliant—Red List Approved Reduces energy consumption, extending life of flooring, reduces water consumption and improves indoor air quality. |



PRODUCT TECHNICAL DRAWING

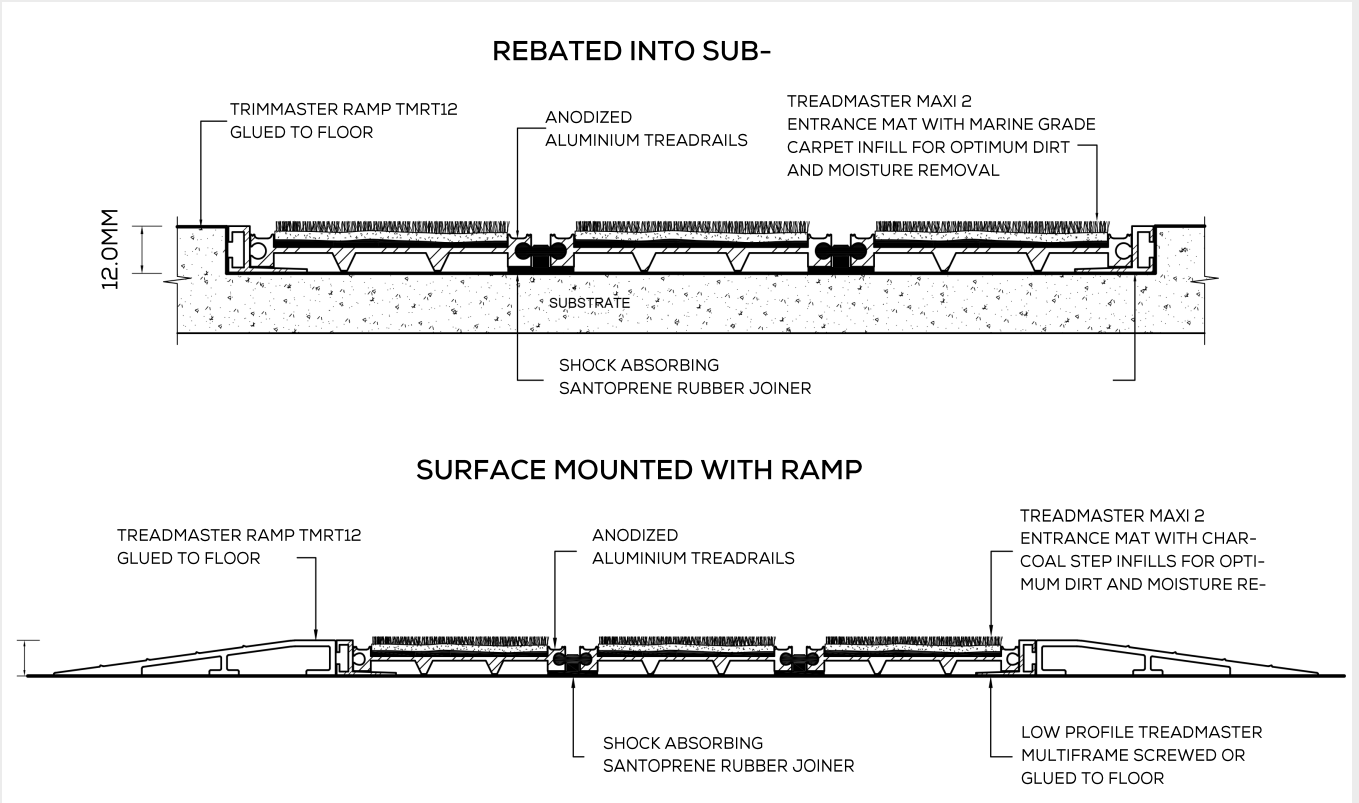

PREVIOUS PROJECTS

