



Stair Nosings & Inserts – SMN110 Technical Data Sheet

Product Name	SMN110 Stair Insert	
Description	Anodised Aluminium base with a 4 Strip Carborundum Insert, recommended for surface mounting on Accessible Stairs, Fire Egress, Back of House, Common Stairs and Service Stairs	
Freedom Works Code	SMN110	
Masterspec Code	Interior	6614FS
Warranty	Installation Warranty	1 year
	Product Warranty	10 years

freedomworks.co.nz
sales@freedomworks.co.nz

09 320 1338
0800 687 004

Scan to visit the webpage




Code Compliance	NZBC D1/AS1	Access routes
	NZS 4121	Design for access and mobility

Base Material	Alloy: 6060, Temper: T5	
Finish	Silver, Black, Bronze or Gold Anodized – 30 µm	
Dimensions	Tread Width	85mm
	Front Depth	35mm
	Tread Thickness	5mm
Installation Method	Adhesive Only or Mechanical and Adhesive Fixing	
	Masonry screw 6mm x 30mm	
Insert Type	Solid epoxy based Carborundum dim – Heavy Duty, External Grade	
Insert Width	54mm	
Insert Colours	Black, Safety Yellow, Luminescent, Grey – other colours available on request	
Application	Predrilled and countersunk for secret screw fixing – One installed, insert covers all fixing	
Sustainability	Declare Label Certified	
	LBC Compliant	Red List Approved
Slip Ratings	Slip Resistance	AS/NZS 4586: 2004 Slip Resistance
	Rating	Average COF of 73



Stair Nosings & Inserts - SMN110
Technical Drawings & Imagery

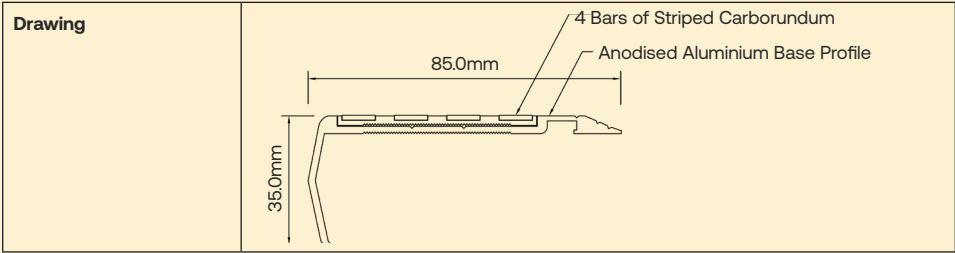

freedomworks.co.nz
sales@freedomworks.co.nz

09 320 1338
0800 687 004

Scan to visit the webpage

